

TYPE C68


(Mostly use: water, oil & other low corrosion mediums)



These light duty seals are suitable for mass produced pumps. They are precision engineered and suitable for the working conditions listed below. The seal contact is made by spring pressure and a rubber diaphragm which can accommodate a small degree of misalignment and wear of the seal face.

WORKING CONDITIONS

- Fluid:** Water, mild chemicals and lubricating oils
- Equipment:** Mass Produced water pumps, dishwashers, washing machines etc.
- Pressures:** External = 5 bar, Internal = 1 bar
- Temperature:** 0°C to 80°C
- Materials:** The rubber diaphragm and the stationary gasket are nitrile and all metal parts are stainless steel with ceramic against carbon.

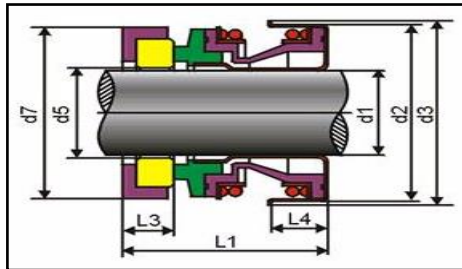

Model	d1	d2	d3	d5	d7	L1	L3	L4
3/8"	11,0	24,0	29,0	12,0	23,0	17,0	4,0	7,0
1/2" S	14,2	28,55	32,0	14,0	25,0	18,2	5,0	8,0
1/2" M	14,2	30,0	35,0	15,0	24/23	18,0	5,0	8,0
1/2" L	14,2	33,4	38,0	14,0	25,0	18,0	5,0	6,7
5/8"	18,2	36,45	41,5	18,0	31,0	19,8	5,0	8,0
5/8" L	18,2	38,1	41,5	18,0	31,0	19,8	5,0	8,0
3/4"	21,2	38/40	43,8	21,0	35,0	20,5	5,0	9,5
1"	26,4	46/47	51,0	29,0	44,0	25,0	7,0	10,0
1" L	26,4	52,0	57,0	29,0	48,0	25,0	7,0	10,0
1 1/8"	31,0	52,0	57,0	32,0	48,0	27,0	8,0	11,0